


ACM-1011

Indoor IP IR Bullet Camera




- 1/3" Micron Progressive Scan CMOS
- Day and night function with Mechanical IR Cut Filter
- Integrated f3.3 ~ 12 mm / F1.6 lens
- Selectable MPEG-4 / MJPEG compression
- VGA resolution at 30 FPS
- Multi-stream with variable frame rate in the same compression
- Two-way audio supported
- Hardware motion detection
- DC 12 V or Power over Ethernet (IEEE 802.3af) supported

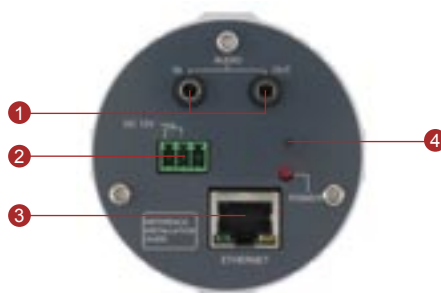


- ① Audio Input / Output
② DC 12 V Power Input

- ③ Ethernet Port
④ Reset Button

DIMENSION DIAGRAM

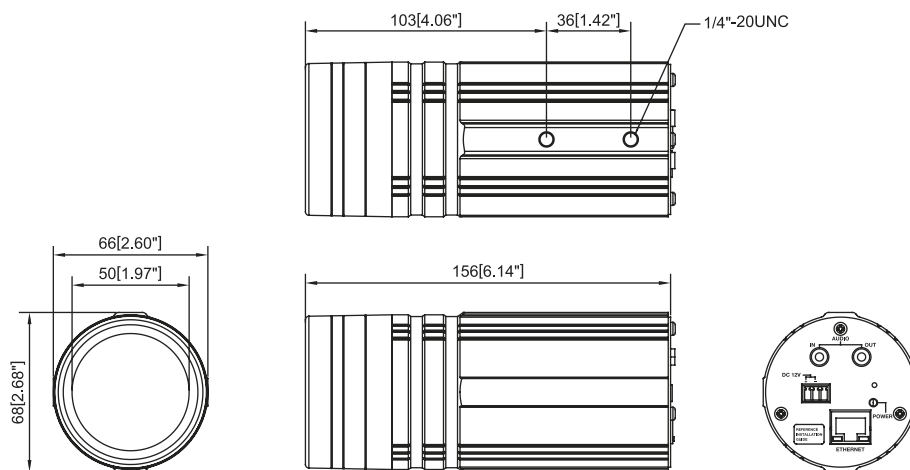

Unit: mm [inch]



PRODUCT SPECIFICATION

		ACM-1011
Image	Device	Micron Progressive Scan CMOS
	Size	1/3 inch
	Effective Pixels	640 x 480
Min. Scene Illumination	Color	Color mode automatically switched to B/W mode under 4 Lux
	B/W	0 Lux (IR LED ON)
	IR Sensitivity	from 700 nm to 1100 nm
	IR LED	IR LED x24 (850 nm)
	CDS Sensor	Yes
Lens	IR Working Distance	20 ~ 30 M (30 IRE)
	Lens	f3.3 ~ 12 mm / F1.6
Viewing Angle	Viewing Angle	89.8° ~ 23.9° (Horizontal)
	Synchronization	Internal
Day/Night Functions	Mechanical IR Cut Filter	Yes
	Motion Detection	Yes (3 Windows)
Functions	Electronic Shutter	1/5 ~ 1/2,000 sec. (60 Hz); 1/5 ~ 1/2,000 sec. (50 Hz)
	Flickerless	1/120 sec. (60 Hz); 1/100 sec. (50 Hz)
	BLC	Yes
	AGC	Automatic (user defined)
	White Balance	AUTO, INDOOR1, INDOOR2, OUTDOOR1, OUTDOOR2, HOLD CURRENT, MANUAL
S/N Ratio	S/N Ratio	Better than 44 dB
	Compression	MPEG-4 SP, MJPEG selectable
Video Compression	Picture Resolution	VGA (640x480) QVGA(320x240) QQVGA(160x112)
	Bit Rate	28 K ~ 3 M bps
	Image Frame Rate	30 fps at VGA resolution
	Compression	8kHz, Mono, PCM
Audio Input	Audio Line Input	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Phone Jack
	Compression	8kHz, Mono, PCM
Audio Output	Audio Line Output	Unbalanced, 1.4Vp-p, 1Vrms, 3.5 mm Phone Jack
	Reset Button	Factory default
External I/O	LED	System status
	Ethernet	Ethernet(10/100 Base-T), RJ-45 connector
Network	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP, DNS, DDNS, NTP, ICMP, IGMP, ARP, 3GPP
	Web Browser	Microsoft Internet Explorer 6.0 or above
Software	SDK	ACTi SDK-10000
	Security	Password protection: configured by the administrator
Operating	Temperature	0 °C ~ 50 °C (32 ~ 122 °F)
	Power Requirement	PoE(IEEE802.3af) with class 3
Power	Power Consumption	6 W (DC 12 V) w/ IR ON 6.24 W (PoE) w/ IR ON
	Dimensions (WxHxD)	66 mm x 156 mm (2.6" x 6.14")
Physical	Weight	505 g (1.11 lb)

ORDERING INFORMATION

Model Name	Description
ACM-1011	Indoor IP IR Bullet Camera

ACCESSORY OPTIONS

- Camera bracket 69-GL220E-R0



69-GL220E-R0

* All specifications are subject to change without notice.
* All brand names and registered trademarks are the property of their respective owners.

www.acti.com
